




- Schiene 1 80 x 10 mm
- Schiene 2 60 x 30 mm
- Schiene 3 2 x 60 x 10 mm
- Rundleiter 55 mm
- Baubreite 120 mm
- Bauhöhe 123,5 mm
- Bautiefe gesamt 58 mm

ASK 81.4 2U

Aufsteck-Stromwandler, sekundär umschaltbar



Primärstrom [A]	Bürde [VA]	Sekundärstrom [A] / Klasse	
		5 A Kl. 1 Best.-Nr.	1 A Kl. 1 Best.-Nr.
1000-500	10-5	10021120	10021320
	15-7,5	10021121	10021321
1200-600	10-5	10021122	10021322
	15-7,5	10021123	10021323
1500-750	10-5	10021124	10021324
	15-7,5	10021125	10021325
	30-15	10021126	10021326
1600-800	10-5	10021127	10021327
	15-7,5	10021128	10021328

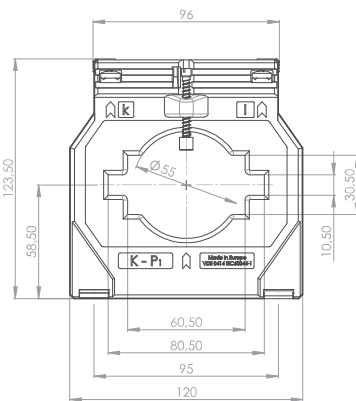

ASK 81.4 3U

Aufsteck-Stromwandler, sekundär umschaltbar

Primärstrom [A]	Bürde [VA]	Sekundärstrom [A] / Klasse	
		5 A Kl. 1 Best.-Nr.	1 A Kl. 1 Best.-Nr.
1000-750-500	10-5-2,5	10021166	10021366
1200-800-600	15-10-5	10021164	10021364
1500-1000-500	15-10-5	10021163	10021363
1500-1000-750	15-10-5	10021165	10021365
1600-800-400	15-10-5	10021162	10021362

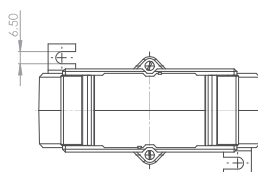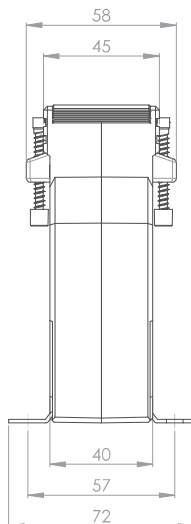

		Best.-Nr.
	Schnappbefestigung	-
	Plombierplatte Form C	10059042